
SPEEDWAY SPM-553SFTB Case Sealer

Side Belt Drive

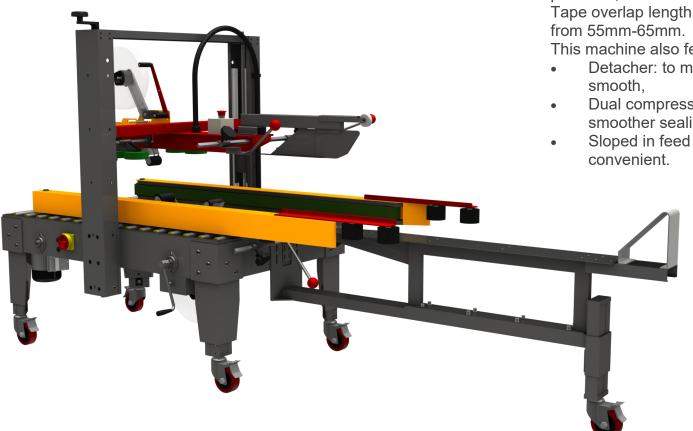

Features:

The SPM-553SFTB uses a new taping head incorporating a V-shaped plate (patented) designed to keep the tape straight and in position for consistent sealing of every carton. Driven by two side drive belts, each belt has a separate drive mechanism using a special bearing bracket. This provides higher precision, lower noise and lengthens belt life. Tape overlap length can be adjusted

This machine also features:

- Detacher: to make taping more stabilized and
- Dual compression rollers: for tighter and smoother sealing.
- Sloped in feed to make flap-folding easier and

Machine comes standard without feed extension roller table (Not Shown) L 500 mm x W 530 mm



Speedway Packaging Machinery

www.spmi.ca

SPM-553SFTB Case Sealer

Specifications

Voltage Power Sealing Speed Tape Width Shipping Weight Carton Weight Carton Size

110 V 1 PH 60 HZ 10 amps

20M/min (66') / min.

2" or 3"


225 kg / 500 lbs

30 kg max


Min: 250mmL x 250mmW x 150mmH


10"L x 10"W x 6"H

Max: 500L x 500W x 500H 20"L x 20"W x 20"H



Dimensions

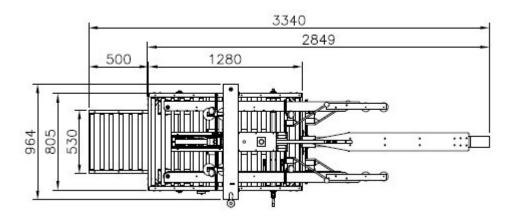

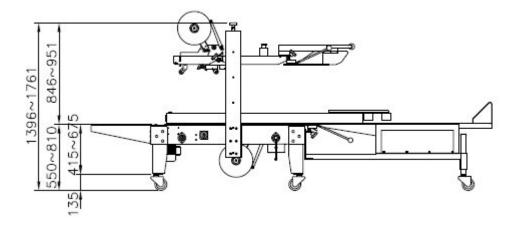

Distributed by:

Speedway Packaging Machinery 50 West Wilmot St., Unit 4-5 Richmond Hill, ON L4B 1M5 (905) 888-5344 www.spmi.ca

Specifications are subject to change without notice-

NOTE: Not suitable to use these machines if the carton's height

exceeds the length.